

**Legend:**

- |        |              |   |              |         |         |
|--------|--------------|---|--------------|---------|---------|
| Power  | Power Input  | GPIO Digital External                         | I2C          | Default | LED     |
| Ground | Power Output | Analog External                               | SPI          | Default | RGB LED |
|        |              | Main Part                                     | UART/USART   | Default |         |
|        |              | Secondary Part                                | Other SERIAL | Default |         |
|        |              | Internal Component                            | Analog       | Default |         |
|        |              | Other Pins (Reset, System Control, Debugging) | PWM/Timer    |         |         |

- CIP0/COPI have previously been referred to as MISO/MOSI
- JSPI and JDIGITAL SPI share the SPI2 MCU peripheral (Can not be used simultaneously as SPI)
- WARNING** A0 and A1 are not 5V tolerant
- WARNING** JCTL pins are 1.8V logic only



SKU code: ABX00162-ABX00173  
Full Pinout - Page 1 of 4  
Last update: 17 Feb, 2026

**DOCS.ARDUNO.CC**

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.


**WARNING!**

## **Advanced Section**

The following information is for advanced use only and may not be officially supported by Arduino software



# LED Matrix 8x13

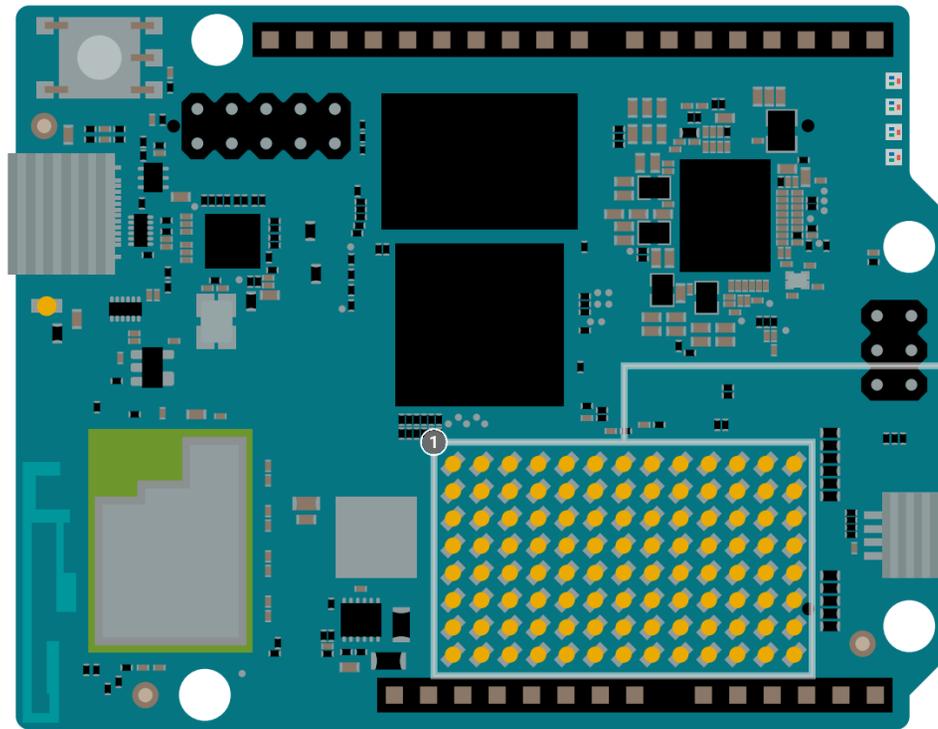

1	2	3	4	5	6	7	8	9	10	11	12	13
14	15	16	17	18	19	20	21	22	23	24	25	26
27	28	29	30	31	32	33	34	35	36	37	38	39
40	41	42	43	44	45	46	47	48	49	50	51	52
53	54	55	56	57	58	59	60	61	62	63	64	65
66	67	68	69	70	71	72	73	74	75	76	77	78
79	80	81	82	83	84	85	86	87	88	89	90	91
92	93	94	95	96	97	98	99	100	101	102	103	104

## Legend:

Power	Power Input	GPIO Digital External	I2C	Default	LED
Ground	Power Output	Analog External	SPI	Default	RGB LED
		Main Part	UART/USART	Default	
		Secondary Part	Other SERIAL		
		Internal Component	Analog	Default	
		Other Pins (Reset, System Control, Debugging)	PWM/Timer		



SKU code: ABX00162-ABX00173  
Full Pinout - Page 3 of 4  
Last update: 17 Feb, 2026

DOCS . ARDUINO . CC




This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

# JMISC

PC6	MCU_PSSI_D0	1	2	MCU_SDMMC1_CMD	PD2
PC7	MCU_PSSI_D1	3	4	MCU_TRACE_CLK	PE2
PC8	MCU_PSSI_D2	5	6	MCU_TRACE_D0	PE3
PC9	MCU_PSSI_D3	7	8	MCU_TRACE_D2	PE5
PE4	MCU_PSSI_D4	9	10	MCU_TRACE_D3	PE6
PI4	MCU_PSSI_D5	11	12	MCU_PE7	PE7
PI6	MCU_PSSI_D6	13	14	MCU_PE8	PE8
PI7	MCU_PSSI_D7	15	16	MCU_I2C4_SCL	PF14
PD9	MCU_PSSI_PDCK	17	18	MCU_I2C4_SDA	PF15
PI5	MCU_PSSI_RDY	19	20	MCU_OPAMP1_VOUT	PA3
PD8	MCU_PSSI_DE	21	22	MCU_OPAMP1_VINP	PA0
PA8	MCU_MCO	23	24	MCU_OPAMP1_VINM	PA1
PA10	MCU_CRS_SYNC	25	26	GND	
GND		27	28	EAR_P_R	
MIC2_INP		29	30	EAR_M_R	
MIC2_INM		31	32	LINEOUT_P	
MIC2_BIAS		33	34	LINEOUT_M	
GND		35	36	HPH_L	
SOC_GPIO_0_SE0		37	38	HPH_R	
SOC_GPIO_1_SE0		39	40	HPH_REF	
SOC_GPIO_2_SE0		41	42	HS_DET	
SOC_GPIO_3_SE0		43	44	GND	
SOC_GPIO_86_SE0		45	46	SOC_GPIO_98	
SOC_GPIO_82_SE0		47	48	SOC_GPIO_99	
SOC_GPIO_18		49	50	SOC_GPIO_100	
SOC_GPIO_28		51	52	SOC_GPIO_101	
+3V3	OUT	53	54	OUT	+5V USB
+3V3	OUT	55	56	OUT	+5V USB
+1V8	OUT	57	58	GND	
VCOIN	IN	59	60	OUT	VBAT

MCU Pins  
3.3V Logic

MPU Pins  
1.8V Logic

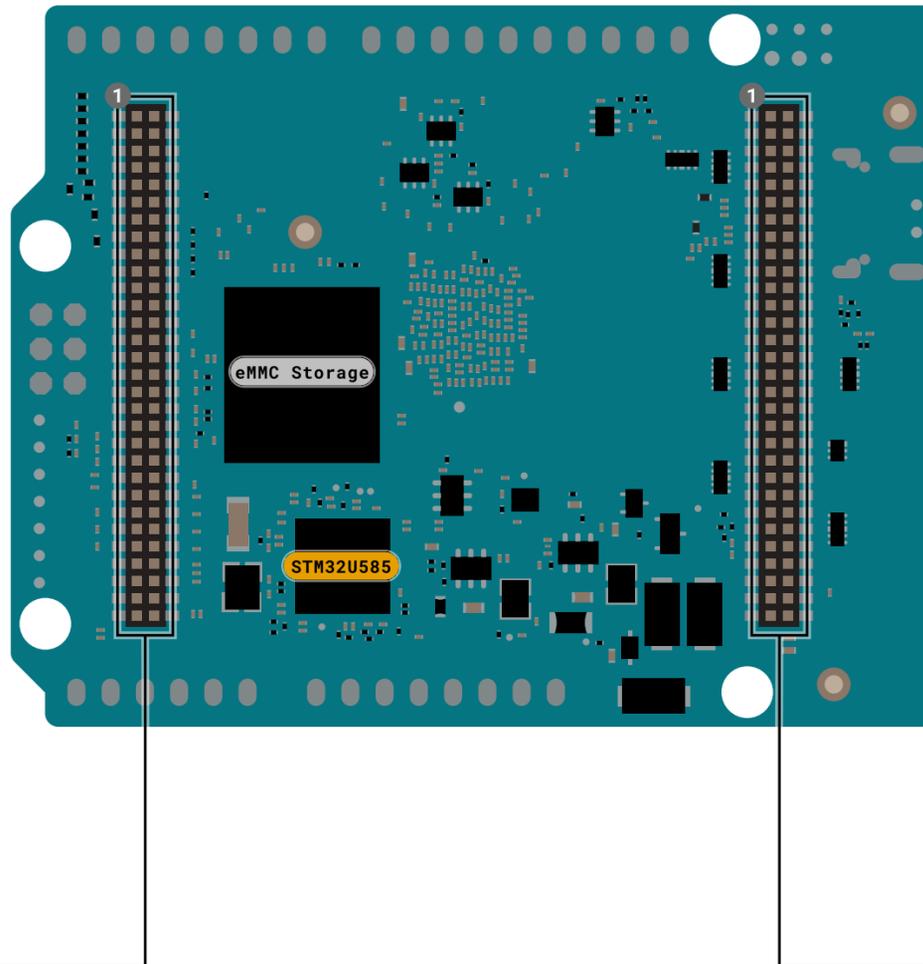

# JMEDIA

GND		1	2	GND	
MIPI_DSI0_CLK_M		3	4	MIPI_DSI0_L1_P	
MIPI_DSI0_CLK_P		5	6	MIPI_DSI0_L1_M	
GND		7	8	GND	
MIPI_DSI0_L2_M		9	10	MIPI_DSI0_L0_P	
MIPI_DSI0_L2_P		11	12	MIPI_DSI0_L0_M	
GND		13	14	GND	
MIPI_DSI0_L3_M		15	16	SOC_CAM_MCLK0	GPIO_20
MIPI_DSI0_L3_P		17	18	SOC_CAM_MCLK1	GPIO_21
GND		19	20	GND	
CSI0_C0_LN0_M		21	22	CCI_I2C_SDA1	GPIO_29
CSI0_B0_LN0_P		23	24	CCI_I2C_SCL1	GPIO_30
GND		25	26	GND	
CSI0_B1_LN1_M		27	28	CSI1_B2_LN3_P	
CSI0_A1_LN1_P		29	30	CSI1_C2_LN3_M	
GND		31	32	GND	
CSI0_A0_CLK_M		33	34	CSI1_C1_LN2_P	
CSI0_NC_CLK_P		35	36	CSI1_A2_LN2_M	
GND		37	38	GND	
CSI0_A2_LN2_M		39	40	CSI1_NC_CLK_P	
CSI0_C1_LN2_P		41	42	CSI1_A0_CLK_M	
GND		43	44	GND	
CSI0_C2_LN3_M		45	46	CSI1_A1_LN1_P	
CSI0_B2_LN3_P		47	48	CSI1_B1_LN1_M	
GND		49	50	GND	
GPIO_23	CCI_I2C_SCL0	51	52	CSI1_B0_LN0_P	
GPIO_22	CCI_I2C_SDA0	53	54	CSI1_C0_LN0_M	
GND		55	56	GND	
VIN	IN	57	58	OUT	+3V3
VIN	IN	59	60	OUT	+3V3

! These pins can not be used as regular GPIOs.

! These pins can not be used as regular GPIOs.

### Legend:

<span style="color: red;">■</span> Power	<span style="border: 1px solid red; border-radius: 50%; padding: 2px;">IN</span> Power Input	<span style="background-color: orange;">■</span> GPIO Digital External	<span style="background-color: blue;">■</span> I2C	<span style="border: 1px solid blue; border-radius: 50%; padding: 2px;">D</span> Default	<span style="background-color: lightgreen;">■</span> LED
<span style="background-color: black;">■</span> Ground	<span style="border: 1px solid red; border-radius: 50%; padding: 2px;">OUT</span> Power Output	<span style="border: 1px solid orange;">■</span> Analog External	<span style="background-color: lightblue;">■</span> SPI	<span style="border: 1px solid blue; border-radius: 50%; padding: 2px;">D</span> Default	<span style="background-color: lightblue;">■</span> RGB LED
		<span style="background-color: yellow;">■</span> Main Part	<span style="background-color: purple;">■</span> UART/USART	<span style="border: 1px solid purple; border-radius: 50%; padding: 2px;">D</span> Default	
		<span style="background-color: gold;">■</span> Secondary Part	<span style="border: 1px solid blue;">■</span> Other SERIAL		
		<span style="background-color: gray;">■</span> Internal Component	<span style="background-color: green;">■</span> Analog Audio	<span style="border: 1px solid green; border-radius: 50%; padding: 2px;">D</span> Default	
		<span style="background-color: darkgray;">■</span> Other Pins (Reset, System Control, Debugging)	<span style="border: 1px solid green;">■</span> PWM/Timer		

**WARNING** Be aware of the pins logic level.

*i* Analog Audio functionality is provided by the PMIC

*i* CIP0/COPI have previously been referred to as MISO/MOSI



SKU code: ABX00162-ABX00173  
Full Pinout - Page 4 of 4  
Last update: 17 Feb, 2026

DOCS . ARDUINO . CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.